


Ventil topcest navoen -INOX

1/2" – 2 1/2"

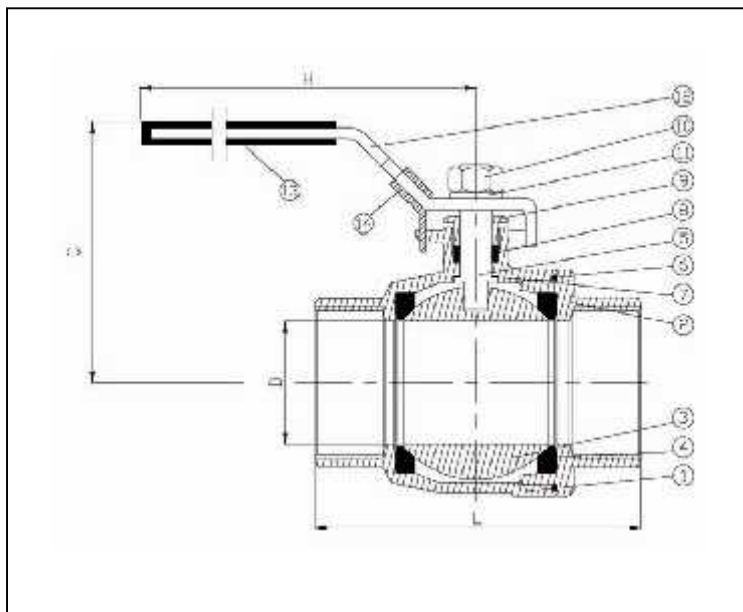

Opis:

Polni pretok, navoj po ISO-228,
dolžina navoja po ISO-7/1

Pritisk:

PN63 za 1/2" do 1 1/2"
PN40 za 2" do 2 1/2"

Temperatura:


-10°C do 230°C

Tesnilo:

PTFE

Vreteno:

Oblika vretena omogoča menjavo tesnil pod tlakom
(»Blow out proof«)

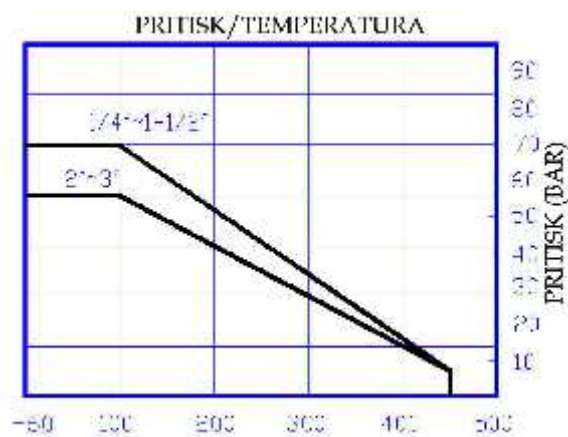

DIMENZIJE (mm)						
Velikost	D	L	C	H	Teža (kg)	Navor (Nm)
1/2"	15	64.7	57.6	105	0.30	4
3/4"	20	73.4	66.6	125	0.50	6
1"	25	84.8	77.7	152	0.80	11
1-1/4"	32	99.5	83.8	152	1.20	15
1-1/2"	38	112.7	95.7	191	1.75	17
2"	49	129	102.3	191	2.80	33
2-1/2"	65	170	142	255	6.60	30

MATERIALI			
Št.	Del	Materiali	Količina
1	Ohišje	CF8M	1
2	Pokrov ohišja	CF8M	1
3	Krogla	A316	1
4	Tesnilo	PTFE	2
5	Vreteno	A316	1
6	Tesnilo ohišja	PTFE	1
7	Podložka	PTFE	1
8	Tesnilo vretena	PTFE	2
9	Pritisna puša	A304	1
10	Matica vretena	A304	1
11	podložka	A304	1
12	Ročka	A304	1
13	Držalo ročke	Plastika	1
14	Sistem za zaklepanje	A304	1