



Versions and product codes



R440N

Compact micrometric valve with thermostatic option, brass chrome plated, with connection for copper, plastic or multilayer pipe adaptors. For twin-pipe systems. Equipped with adjustable lockshield valve.
Supplied with R171P plastic probe, Ø 12 mm, lenght 450 mm.
Connection to the system pipes with R178, R178C, R179 or R179AM adaptors.

Code	G x B	I [mm]	H [mm]	J [mm]	L [mm]	C [mm]	M [mm]	W [mm]
R440NX032	1/2" x 16	35	77	31	133	56	42	32

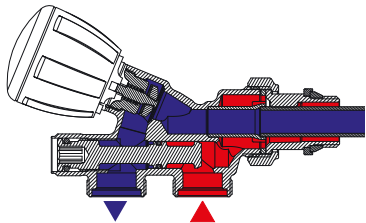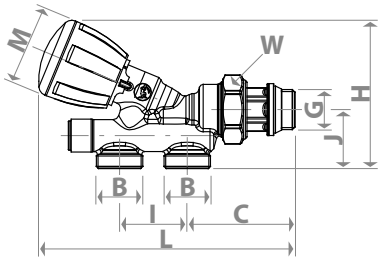

R438

Angled valve and lockshield valve group with thermostatic option and connections from the floor, brass chrome plated, with connection for copper, plastic or multilayer pipe adaptors. For twin-pipe systems. Equipped with adjustable lockshield valve. To be completed with R194 chrome plated connection pipe, Ø16 mm.
Connection to the system pipes with R178, R178C, R179 or R179AM adaptors.

Code	G x B	I [mm]	J [mm]	L [mm]	C [mm]	M [mm]	W [mm]	K [mm]
R438X062	1/2" x 16	35	37	68	46	42	30	27
R438X063	1/2" x 18	50	42	68	38	42	30	27

