




**BILIGHT MODELI SA VISOKO EFIKASNIM IZMENJIVAČEM
TOPLOTE**

GCV9S(L) 100 44 20 B11
TSRCP

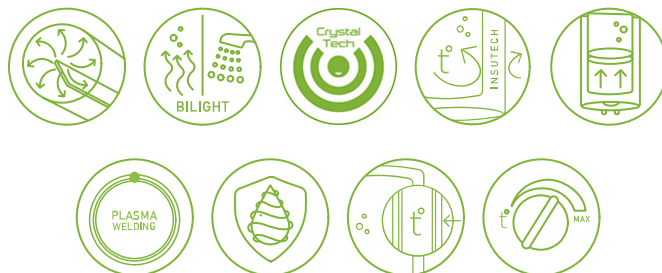

	BiLight 100 S
Neto zapremina	96 L
Nazivna snaga	2000 W
Energetska klasa	C
Prečnik	440 mm
Vreme zagrevanja Δt 45K (15 - 60°C)**80%	0:18 h:min
Visina	0.985 m
Širina	0.440 m
Dubina	0.467 m
Čaura senzora toplote	x1 pieces
Površina serpentine	0.7 m ²



Zapremina serpentine	3.2 L
Maksimalan protok sanitarne vruće vode kod ΔT 35°C *60-80°C	433 L/h
Maksimalna snaga serpentine *60-80°C	18.5 kW
Statički gubici	64 W